

Final instructions on completing the quilt.

To complete the applique block. Trim to $6\frac{1}{2}'' \times 6\frac{1}{2}''$.


To add the triangles, from plain white fabric cut square $5\frac{1}{2}''$ cut half diagonally. Sew onto the applique blocks, trim block to $9'' \times 9''$.

For pieced sashing [the option is to use whole fabric instead of piecing]

Cut 2'' squares of background and yellow fabric, line up, draw diagonal line, and sew $\frac{1}{4}''$ on both sides of line and cut at drawn line. Press seam open. **Trim squares to $1\frac{1}{2}'' \times 1\frac{1}{2}''$** . This is important, as I found out when taking a Precision Piecing class with Wanda Steiner in Winnipeg. To be more accurate with piecing, any pieced unit should be made bigger, then trimmed to the desired size.



For each unit, sew together 9 half squares. Referring to diagram.

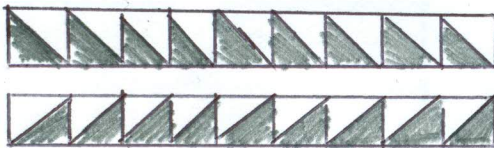

18 units of half square are slanted one way and 18 units of half square are slanted the opposite way. Refer to diagram to make the sashing making note as to the position of the angle.

Also add white and yellow corner stones, cut $1\frac{1}{2}'' \times 1\frac{1}{2}''$, where the sashing meets

For corner and set in triangles on quilt edge:

For corner triangles, from yellow print, cut $8\frac{3}{4}'' \times 8\frac{3}{4}''$, cut half diagonally.

For set in triangles, from yellow print, cut $15\frac{1}{2}'' \times 15\frac{1}{2}''$, cut half diagonally twice.

Quilt and bind as you please.

Please add a label to the back of the quilt, stating the name of the quilt, the maker of quilt, city and date.... The future generation will thank you. Simple iron freezer paper to the back of plain white fabric and using a permanent fabric pen, write your specifics on the front of the fabric.

Congratulations... you are done!

I want to sincerely thank Murray Day for his continued support in maintaining my web site. Without his help, this BOM would not have been possible.

